




Dell OptiPlex FX170 Internal Speaker Replacement

This guide will help you remove and replace a malfunctioning internal speaker.

Written By: Jess J Cunning

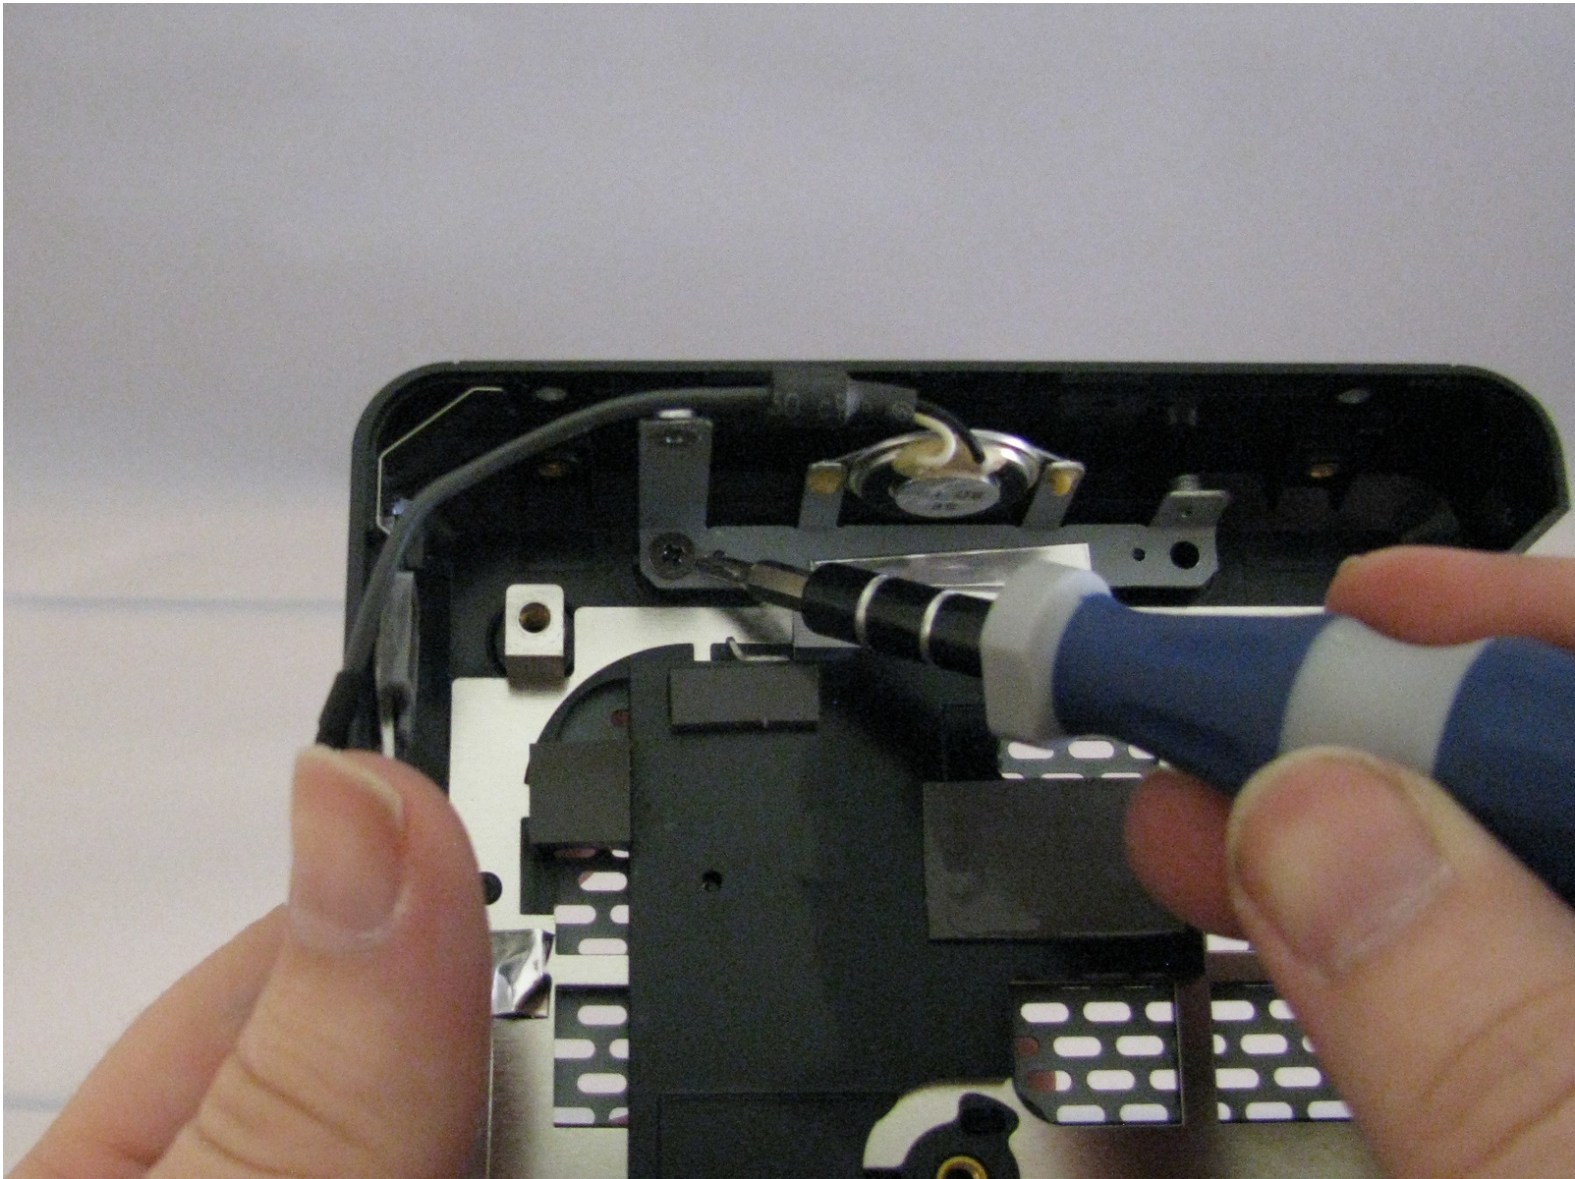

INTRODUCTION

We are going to guide you through the steps to remove the current speaker and replace it with a new speaker.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)



PARTS:

- [1 inch diameter, 1 watt, 8 ohm speaker](#) (1)

Step 1 — Case



- With the base stand facing upwards, unscrew the 6mm Phillips #2 screw.
- Pull the base stand straight up from the device.

Step 2




- Unscrew and remove the eight 4mm Phillips #0 screws (four on top, four on bottom) from the top and bottom of the device.

Step 3



- Run the flat side of the spudger along the entire line of the case starting from the back where the power plug and a small screw are located.


 Use care to not apply excessive force that could damage retaining clips while running the spudger along the case.

Step 4




- Once the clips have been released, gently disengage the cover from the rest of case by pulling in opposite directions.

Step 5 — RAM

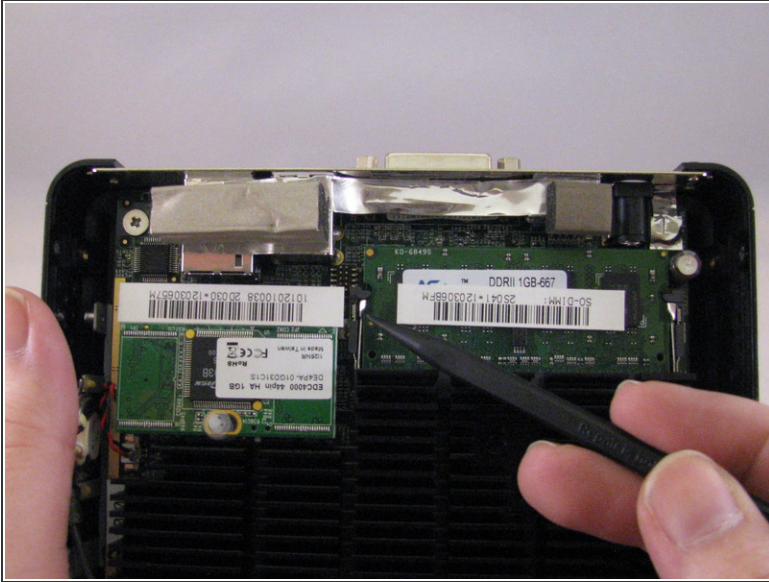


- Using fingers, push the clips on either side of the RAM. The RAM will pop up at a 45 degree angle when both clips are disengaged.

Step 6

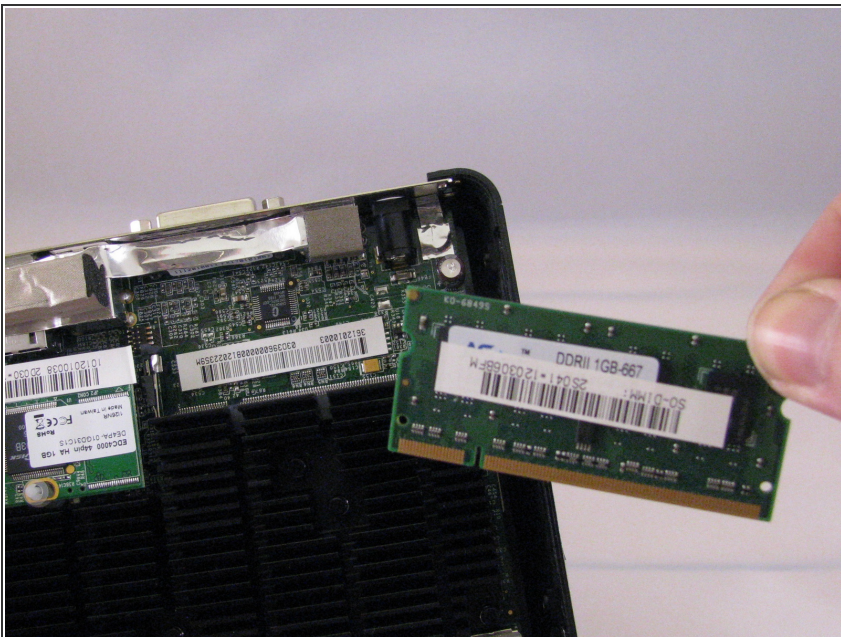

- Lift and pull out the RAM.

Step 7 — Memory Board

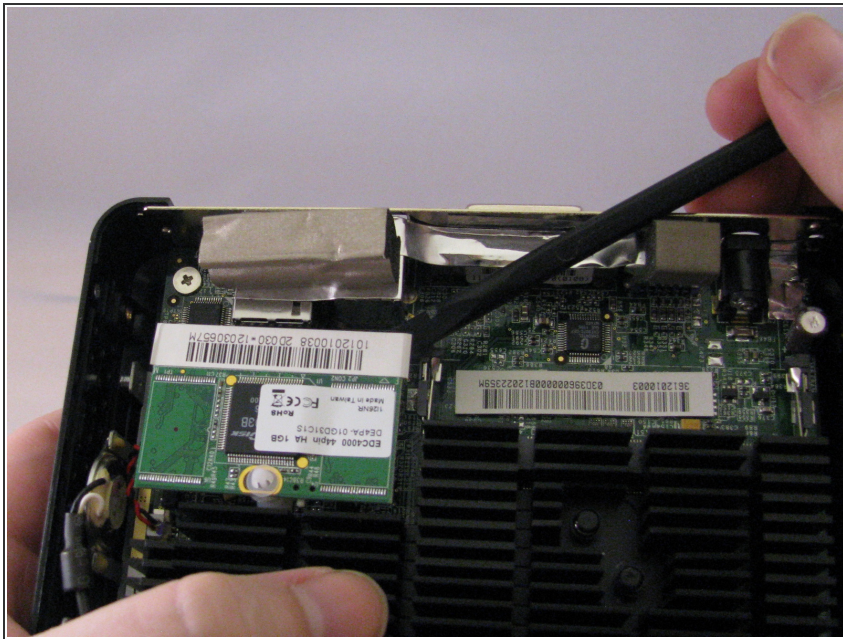


- Using the spudger, gently push on the underside of the memory board to loosen it. Gently grasp each side and pull up to release the memory board.

Step 8 — Motherboard





- Remove the two 4mm Phillips #00 screws that are along the back of the case.

Step 9

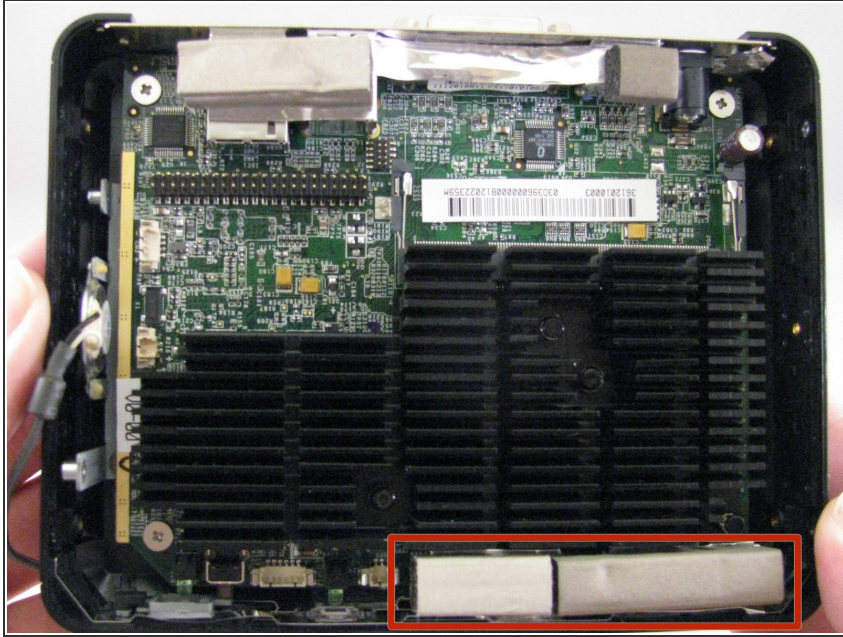

- Remove the two foam bumpers that lie on top of the two front USB ports with fingers. Do not throw them away.

Step 10

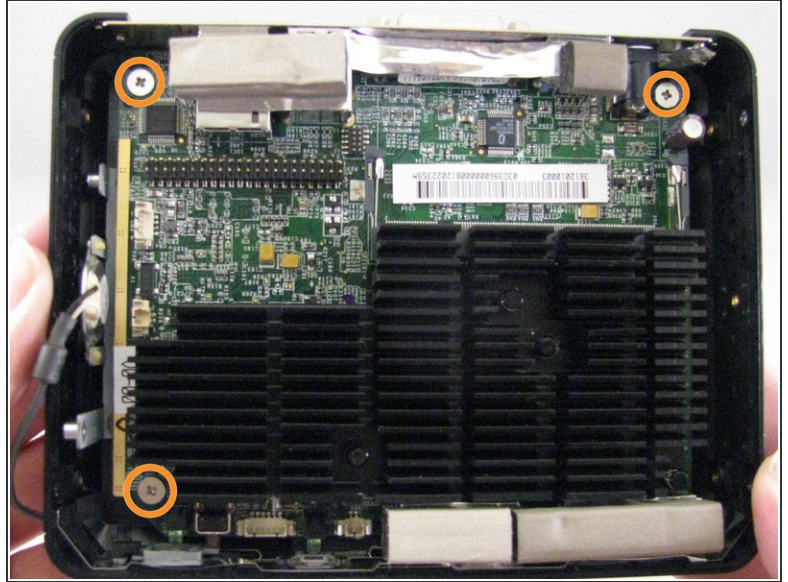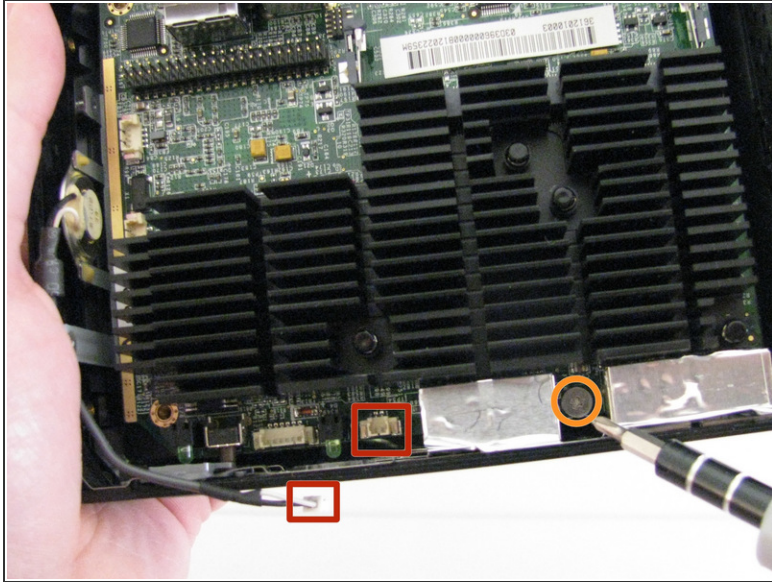


- Disconnect the speaker cable from the motherboard by gently pulling it straight up to disengage it from the port.
- Remove the four 4mm Philips #0 screws that secure the motherboard to the case.
- ⓘ The screw in the corner where the RAM is located is covered by a small piece of Mylar tape, peel this tape back to reveal the screw. The tweezers can be helpful for this.


Step 11



- Gently grasp the motherboard by the heat sink (the black finned piece). Lift the motherboard at an angle such that the ports along the back side come up first.
- Continue lifting the motherboard, then slowly tilt the piece off to the right to break the Mylar tape over the front USB ports.


 Be careful when handling the motherboard to prevent electro-static discharge (ESD) damage. If the motherboard is being removed as part of a prerequisite, place the motherboard into a bag designed to prevent a build up of a static charge (usually referred to as a static bag).

Step 12 — Internal Speaker Removal

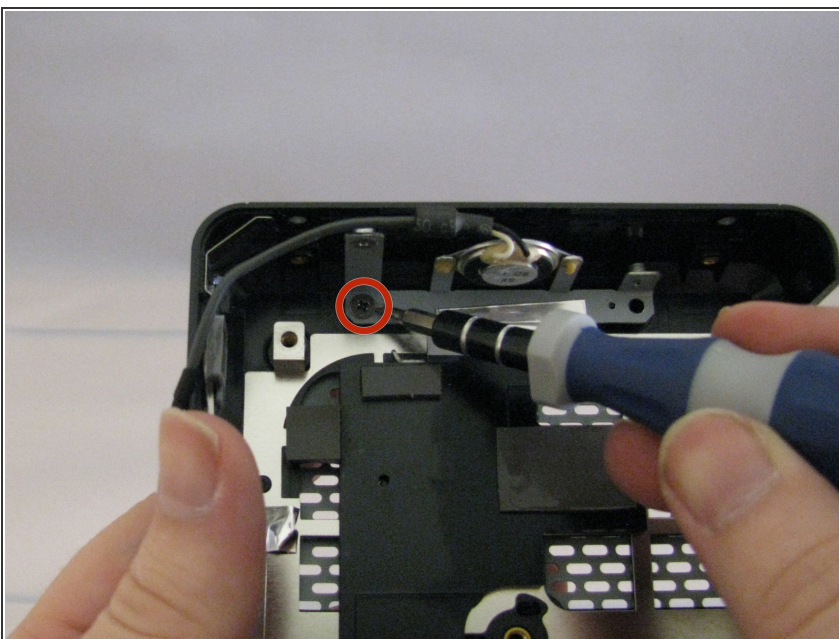

- Remove the 5mm Philips #0 screw securing the speaker mounting bracket to the case.

Step 13

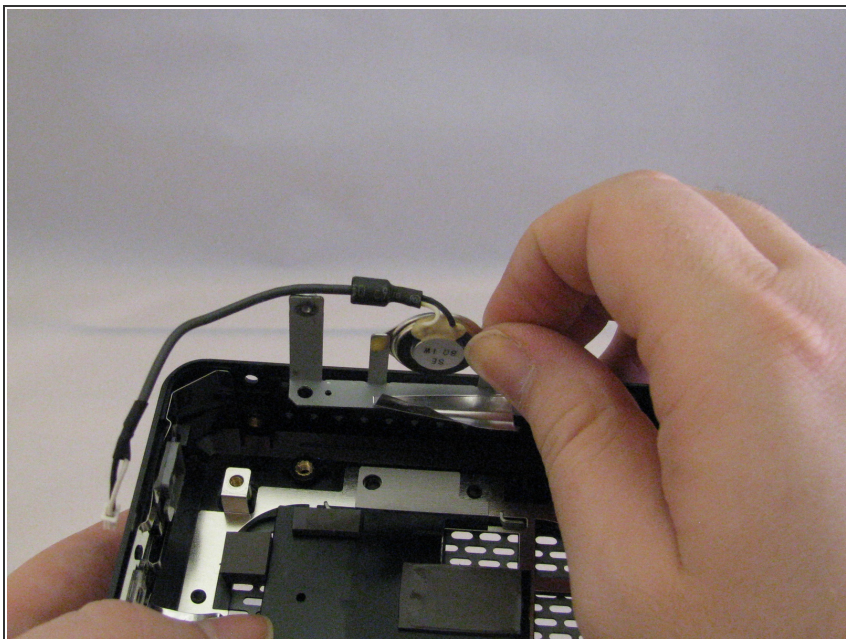

- Grasp the speaker mounting bracket and lift it up from the case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 07:57:05 AM.